


K-Lock Mounting System

(Base options for horizontally mounted lights)

K-Lock is a twist-lock system that connects a horizontally mounted light and base together with a ¼-turn. The assembly is then secured with a stainless set-screw and is waterproof to 50 meters of immersion.

K-Lock Bases

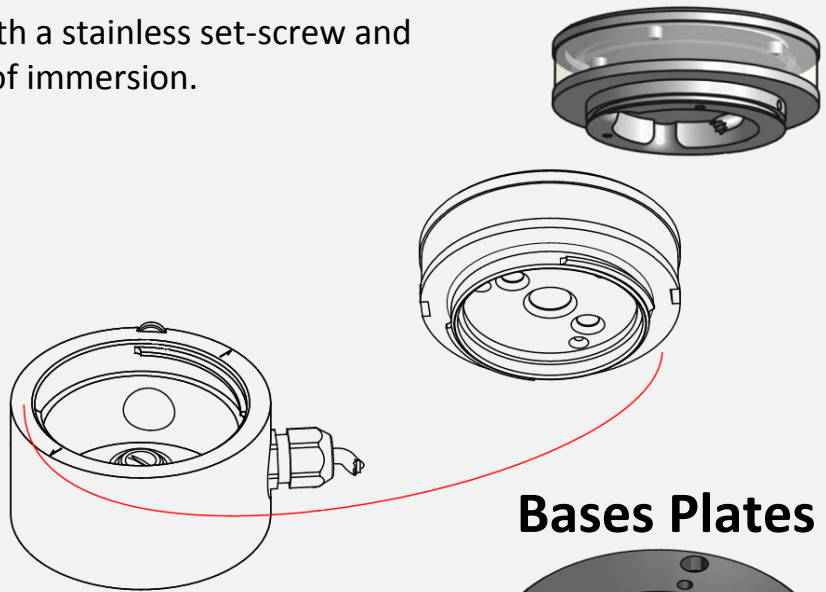

Bases Plates



Part No.	Vessel Size = Light Types = Base Types	Standard (Original) Series						All Series		Pro-Series	
		<12m	<20m	<50m		≥50m		<50m & ≥50m		<50m & ≥50m	
		All	All	All*	Mast Head	All*	Mast Head	Stacked Doubles ³		All*	Mast Head
STD	Standard HDPE Base	Std	Std	Std	N/A	Alt	N/A	N/A		N/A	N/A
400-036	Ultra-Low ¹	Opt	Opt	Opt	N/A	Opt	N/A	N/A		N/A	N/A
400-034	Pro-Mount (Side & Bottom Glands, 2 ea.) ¹	Opt	Opt	Opt	Std	Std	Std	Alt		Std	Std
400-035	Pro-Mount (Bottom only Glands, 4 max) ¹	Opt	Opt	Opt	Alt	Alt	Alt	Std		Alt	Alt
400-404	Baseplate - Round Plastic ²	Opt ⁴	Opt ⁴	Opt ⁴	Std	Std	Std	Std		Std	Std
400-401	Baseplate - Round ^{1 2}	Opt	Opt	Opt	Opt	Opt	Opt	Opt		Opt	Opt
400-402	Baseplate - Square Adapter for AQS 55 ^{1 2}	Opt	Opt	Opt	Opt	Opt	Opt	Opt		Opt	Opt
400-403	Baseplate - Square Adapter for AQS 70 ^{1 2}	Opt	Opt	Opt	Opt	Opt	Opt	Opt		Opt	Opt

*All Navigation and Signal Lights except Masthead Lights

¹ Milled Aluminum anodized in Black or Silver

² Compatible with Pro-Mounts only

³ Stacked Doubles = Any fixture with 4 lights (typically a Double Anchor light stacked on a Double Masthead light)

⁴ A Plastic Base Plate is provided Std when the Pro-Mount Option is requested

Alt = can be provided as Standard upon request