


Hard-wearing, slip-resistant matting perfect for commercial and industrial workplaces.



Our number one defense against slippery environments, Vynagrip is heavy-duty matting designed to withstand all kinds of workplace spillages to ensure a safe environment.

Made from non-porous PVC with a diamond cut pattern, Vynagrip is impermeable to fluids and provides excellent drainage, making it ideal for environments where spillages are likely. It's also perfect for workplaces with standing employees: the two-layer construction provides comfortable cushioning and anti-fatigue properties proven to help boost productivity.

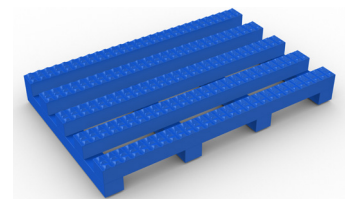

Features:



Diamond cut pattern




Two layer open-grid construction



Made from non-porous PVC



Proven anti-fatigue properties



Comes in 33' (10m) rolls or ramped modules



Benefits:



Certified slip resistant
(DIN 51130:R11, ASTM I677: I.0/0.9)



Excellent drainage
(DIN 51130:V10)



Chemical, oil and acid resistant



Boosts productivity



Contours to uneven surfaces



Plastic Extruders Ltd.

Russell Gardens, Wickford
Essex, SS11 8DN
+44 (0) 1268 571 116

UK + USA manufactured
matting products:
plastexmatting.com

Standard sizes:

	Vynagrip and Vynagrip Plus	Vynagrip Modules
Height	5/8" (15mm)	5/8" (15mm)
Standard roll options	33' x 2' (10 x 0.6m)	
	33' x 3' (10 x 0.91m)	
	33' x 4' (10 x 1.22m)	
Standard module options		4' x 2'5" (1.2 x 0.8m)
		5' x 3'3" (1.5 x 1m)
Weight	1.6lb/sq.ft (7.6kg/m2)	1.6lb/sq.ft (7.6kg/m2)

Surface modules are supplied with factory fitted PVC ramped edging to four sides

Tolerances:


	Height (+/- 0.05")	Length (0+1.0')	Width (+/-1/2")
Vynagrip	5/8"	33'	2' 3' 4'
Vynagrip Plus	5/8"	33'	2' 3' 4'

All dimensions are nominal


Technical information:

Acoustic	Excellent sound absorption
Anti-fatigue	10% reduction in fatigue (University of Hertfordshire study, 1997).
Chemical	Resistant to most acids, alkalines and oils. You can read more about specific chemical resistances by downloading this information sheet .
Composition	Flexible Polyvinyl Chloride (PVC)
Electrical	BS 2782: Part 2 Method 230A. Insulation resistance > 2000M Ω Electric strength = 12,600 volts
Environment	Vynagrip is 100% recyclable. When manufactured in black, it's made using our post industrial recycled material. The recycled content averages at least 30%, but we strive for 100% wherever possible. We don't use any substances included in the SVHC list under REACH in any of our matting products.
Fire	EN ISO 13501 - 1 : 2007 - Cfl - S1.
Hygiene	Made from non-porous PVC that's naturally resistant to bacteria growth.
Reversion	Thermoplastic shrinkage can result in size reductions up to 2%. This may be accelerated in hot environments. You can read more about the causes of shrinkage by downloading this information sheet .
Slip resistance	ASTM F 1677- Dry/Wet: 1.0/0.9 DIN 51130: R11, V10
Thermal	Designed to function at temperatures from -9°F and up to +140°F. Slight size variation may occur at temperature extremes..
UV light	Resistant to PVC degradation. The red color isn't colorfast in direct sunlight.
Warranty	Four years. Visit our policies page for more information about warranties


Colors:




Black



Red



Blue



Black with yellow
bands

More colors
available
upon request

Installation:

Vynagrip's one-piece construction means installation is simple:

- Choose from 33' (10m) rolls or modules
- Rolls are easy to cut on site
- Modules come with factory fitted edging around three sides and fit snugly against work stations
- Contours to uneven surfaces

Cleaning:


Keeping Vynagrip looking good is easy:

- Easy to move; simply roll or lift to clean
- No special cleaning tools needed
- Easy to wash down with a high pressure hose

Ancillaries:


> Vynagrip and Vynagrip Plus

PVC edging (H: 9/16, W: 2 1/2")




Supplied in rolls of 33' (10.1m) length with cold welding paste. Comes in black, dark gray, dark brown, holly green, Oxford blue, yellow. Size: 9/16" x 2 1/2" x 33' (14mm x 60mm x 10.1m)

PVC edging (H: 9/16, W: 3 3/4")




Supplied in rolls of 33' (10.1m) length with cold welding paste. Comes in black, dark gray and yellow. Size: 9/16" x 3 3/4" x 33' (14mm x 100mm x 10.1m)

Aluminum edging (H: 5/8")



Supplied in sections of 6'6" (2m) length with fixing screws and plugs. Comes in anodized aluminum and powder coated yellow. Size: 5/8" x 1 13/16" x 6'6" (15mm x 45mm x 2m)

PVC snap track (H: 9/16")




Two-part snap track that can be welded together to join rolls end-to-end or side-to-side to cover large areas. Supplied with cold welding paste. Comes in dark gray. Size: 9/16" x 8'2" (14mm x 2.5m)

Large floor hooks (H: 9/16")



For securing sections of matting to the floor. Supplied in packs of 10 with screws and plugs

Small floor hook (H: 9/16")




For securing sections of matting to the floor. Supplied in packs of 20 with screws and plugs

Ancillaries:

> Vynagrip and Vynagrip Plus

Connector clips: side-to-end (H: 9/16")



For joining sections of matting together side-to-side. Supplied in packs of 10

Connector clips: dual purpose (H: 9/16")



For joining sections of matting together side-to-side or end-to-end. Supplied in packs of 10