

INSTRUCTIONS | BE BULLS EYE

Installation

- Position the BE Bulls Eye in the desired location
- Mark and drill hole
- Fasten the unit securely on the deck
- BE Bulls Eyes are self sealing with the silicone gasket provided

SAFETY

This product is designed for use on sailboats, the sport of sailing carries a risk of personal injury. Spinlock accept no liability whatsoever for any claim that may relate directly or indirectly to the use of this equipment in any manner for any application or loading other than advised in current product information published by Spinlock Ltd.

- Check that this product is correctly specified for your application, load and line size.
- Check carefully that it is correctly installed before using it for the first time under load.
- Use braided fibre rope only (never use three strand or wire rope).
- Never use the product if damaged or worn.
- Never use the product with damaged rope.
- Never use cleaning or lubricating solvents, polysulphide or polyurethane based sealants: they degrade the product.
- Do not modify any part of the product.

For full details on the range including technical specifications, please visit www.spinlock.co.uk

MODEL	FASTENERS
BE06/TF	2x M4 (5/32") CSK HEAD DIN7991
BE010/TF	2x M5 (3/16") CSK HEAD DIN7991
BE012/TF	2x M5 (3/16") CSK HEAD DIN7991
BE016/TF	2x M6 (1/4") CSK HEAD DIN7991

Certified



Corporation


WWW.SPINLOCK.CO.UK

For technical advice and support please email prosupport@spinlock.co.uk.

For warranty and liability, see www.spinlock.co.uk/warranty.

Spinlock Ltd, Birmingham Road, Cowes, Isle of Wight, PO31 7BH, UK.



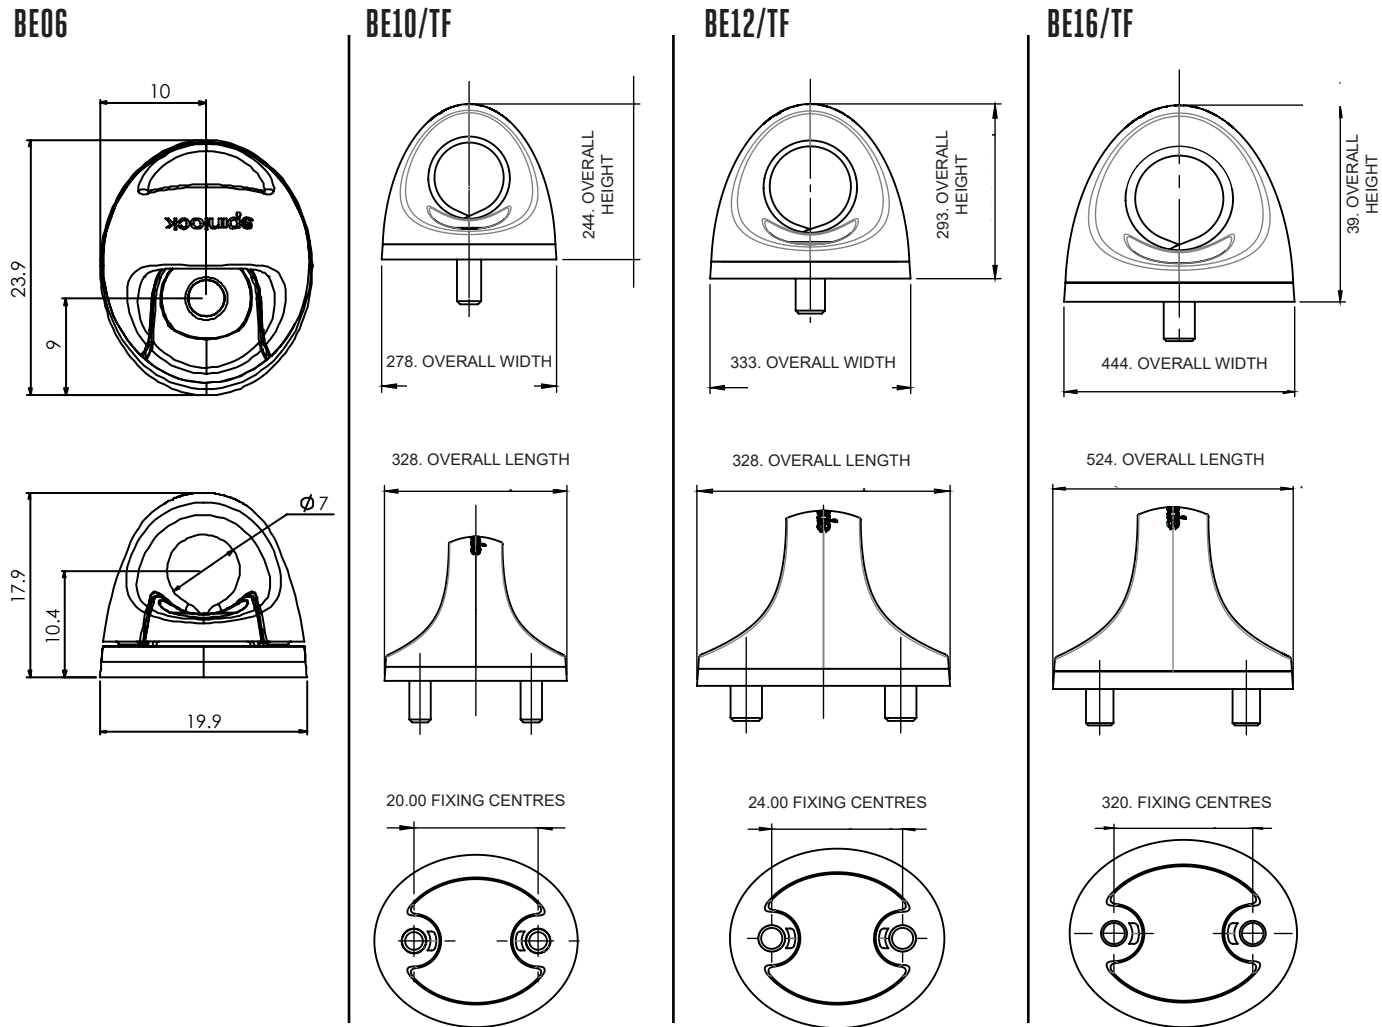

Line Drawings are not to scale, use drill guides from web link for fastener dimensions.
All dimensions in mm



WWW.SPINLOCK.CO.UK

For technical advice and support please email prosupport@spinlock.co.uk.

For warranty and liability, see www.spinlock.co.uk/warranty.

Spinlock Ltd, Birmingham Road, Cowes, Isle of Wight, PO31 7BH, UK.

