



FLEXI LINE 2G

CLEVER BEAUTY
FOR SANITARY STYLE

the next generation



CLEVER IMPROVEMENTS ON INSTALLATION AND HYDRAULICS

Silence Plus 2G Short



Silence 2G Short



Short version through floor installation

Some applications require a short version of toilet and bidet with an adjusted height to be installed on a step.


Without compromises on performance and quality, all Tecma components have been further optimized to make the most of the available internal space.

An installation of a short toilet through the floor requires an additional cut out of the floor to accommodate protruding motor and hoses.

Silence Plus 2G Short



Cross section
Silence Plus 2G Short, Deep Bowl
(Through Floor Installation)

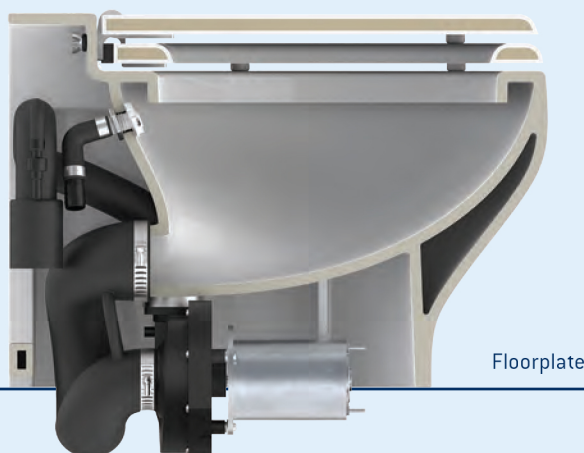

SILENCE PLUS 2G

Great design with the comfortable 'big bowl'

Silence Plus 2G

The 'big bowl' model of the Flexi-Line, the Silence Plus 2G forms the foundation for the Flexi Line. With the same features, a new design and new 2nd Generation System Improvements, it is supremely comfortable and effective. A length of 51 cm / 20.1 inches creates an at-home seating feeling. The model's short version is designed for installed on a raised step, usually 10 cm / 3.9 inches high. For this purpose, the ceramic shell height is reduced to 36 cm / 14.2 inches to compensate and match the standard seating height of 46 cm / 18.1 inches.

Silence Plus 2G



WEIGHT	25.5 kg / 56.2 lb
H x W x D	460 x 390 x 510 mm / 18.1 x 15.4 x 20.1 inches

FOOTPRINT	405 x 280 mm / 15.9 x 11.1 inches
WATER USAGE	0.5 - 2.7 L / 0.1 - 0.7 gal per flush
COLOR	White, optional: bone
SEAT AND COVER	Polyester with soft closing system (Sugatsune™ damper)
OUTLET PUMP*	MAC 11 12/24 v
INLET DEVICE	Solenoid, optional: inlet pump
CONTROL PANEL	All-in one / Multiframe / Argent / Touch/ Premium Touch / Premium



Silence Plus 2G Short



WEIGHT	23.5 kg / 51.8 lb
H x W x D	360 x 390 x 510 mm / 13.8 x 15.4 x 20.1 inches

FOOTPRINT	405 x 280 mm / 15.9 x 11.1 inches
WATER USAGE	0.5 - 2.7 L / 0.1 - 0.7 gal per flush
COLOR	White, optional: bone
SEAT AND COVER	Polyester with soft closing system (Sugatsune™ damper)
OUTLET PUMP*	MAC 11 12/24 v
INLET DEVICE	Solenoid, optional: inlet pump
CONTROL PANEL	All-in one / Multiframe / Argent / Touch/ Premium Touch / Premium

*2G 110V configurations are potentially available on request. Please consult our sales representatives.

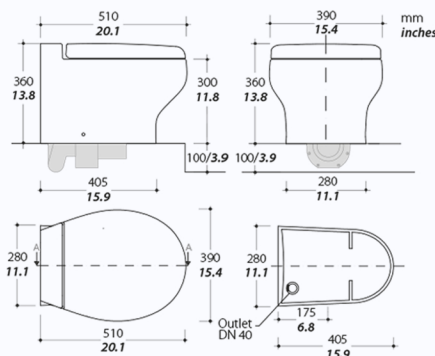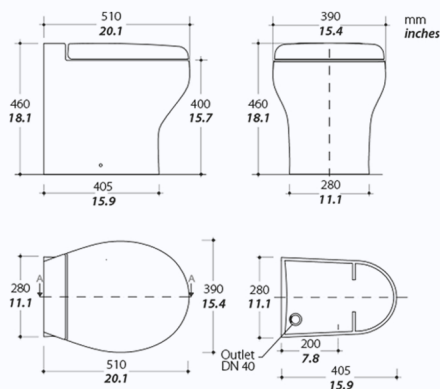

SILENCE 2G

Maximize the comfort within reduced space

Silence 2G

As with Silence Plus 2G, the Silence 2G offers the same smooth design and smart 2nd Generation System Improvements. It just differs in size. Silence 2G models are the 'medium bowl' size model of the Flexi Line – and all about maximizing comfort in reduced space. A length of 43 cm / 16.9 inches creates the at-home seat feeling. The Silence 2G Short is designed to be installed on a raised step, usually 10 cm / 3.9 inches high. For this purpose, the ceramic shell height is reduced to 36 cm / 14.2 inches to compensate and match the standard seating height of 46 cm / 18.1 inches.

Silence 2G



WEIGHT	22.5 kg / 49.6 lb
H x W x D	460 x 370 x 430 mm / 18.1 x 14.6 x 16.9 inches

FOOTPRINT	390 x 280 mm / 15.4 x 11.1 inches
WATER USAGE	0.5 - 2.7 L / 0.1 - 0.7 gal per flush
COLOR	White, optional: bone
SEAT AND COVER	Polyester with soft closing system [Sugatsune™ damper]
OUTLET PUMP*	MAC 11 12/24 v
INLET DEVICE	Solenoid, optional: inlet pump
CONTROL PANEL	All-in one / Multiframe / Argent / Touch/ Premium Touch / Premium



Silence 2G Short



WEIGHT	19.5 kg / 42.9 lb
H x W x D	360 x 370 x 430 mm / 14.2 x 14.6 x 16.9 inches

FOOTPRINT	390 x 280 mm / 15.4 x 11.1 inches
WATER USAGE	0.5 - 2.7 L / 0.1 - 0.7 gal per flush
COLOR	White, optional: bone
SEAT AND COVER	Polyester with soft closing system [Sugatsune™ damper]
OUTLET PUMP*	MAC 11 12/24 v
INLET DEVICE	Solenoid, optional: inlet pump
CONTROL PANEL	All-in one / Multiframe / Argent / Touch/ Premium Touch / Premium

*2G 110V configurations are potentially available on request. Please consult our sales representatives.

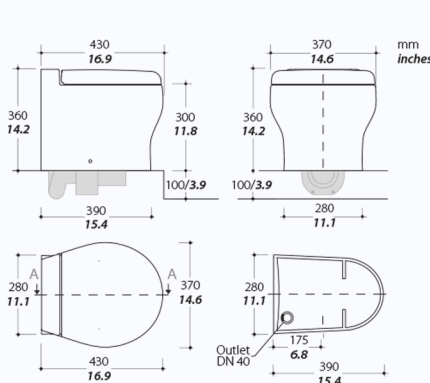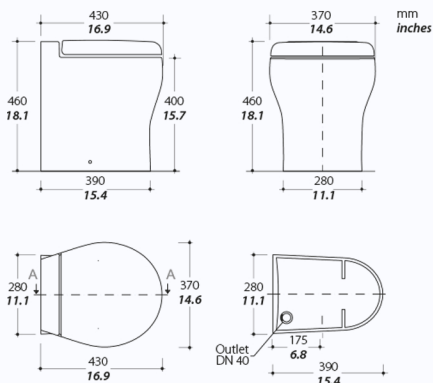



TECHNICAL SPECIFICATIONS


50-100 ft
Flexi line 


	WIRE GAUGE SIZE CHART	
	Distance from source* is:	
	1-2 m	> 2 m
12V dc	11 AWG (4.17 mm ²)	9 AWG (6.63 mm ²)
24V dc	13 AWG (2.63 mm ²)	11 AWG (4.17 mm ²)
110-125V ac 60Hz	18 AWG (0.82 mm ²)	18 AWG (0.82 mm ²)
220-240V ac 50Hz or 60Hz	18 AWG (0.82 mm ²)	18 AWG (0.82 mm ²)

*Distance measured assumed power and ground wires

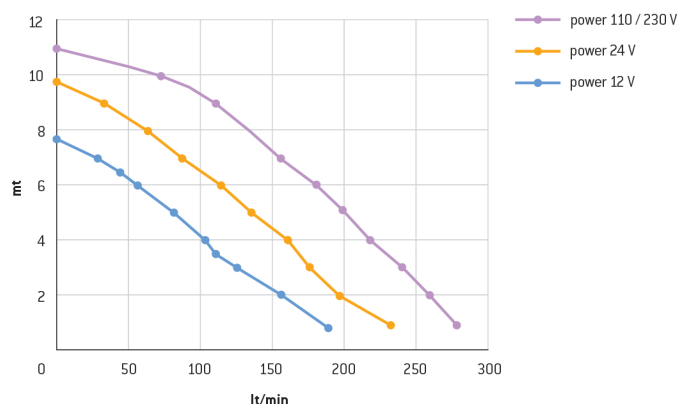

	MAC 11 outlet pump macerator turbine			
	12V dc	24V dc	110-125V ac 60Hz	220-240V ac 50Hz or 60Hz
Fuse recommended	40 A	30 A	8 A	5 A
Pump performance	Max 270 l/min 71.3 gpm Max vertical head 11 mt 36.1 ft Max horizontal distance 90 mt 295.3 ft			
Outlet Duck Bill valve (male)	1 1/2" / required ID 1 1/2" (38.5mm)			

	INLET PUMP single system (raw water)	
	12V dc	24V dc
Fuse	8 A	4 A
Pressure	45 PSI - 3 bar	
Water flow	12 L/min 3.17 gmp	
Toilet inlet hose fitting (barbed)	1/2"	

	INLET SOLENOID centralized system			
	12V dc	24V dc	110-125V ac 60Hz	220-240V ac 50Hz or 60Hz
Power	9.5W	10W	6W	6W
Maximum pressure recommended	3 bar	3 bar	3 bar	3 bar
Solenoid inlet & outlet (threaded female)	1/2"			
Toilet inlet hose fitting (barbed)	1/2"			


HOW TO ORDER

What you need to order to receive a functioning toilet

Flexi line ^{50-100 ft} 

FRESH WATER

Toilet SKU

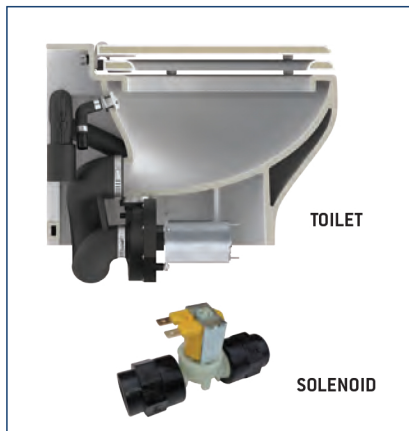

- Includes everything but the control panel

Control Panel SKU



ALL-IN-ONE (1 or 2 button)



MULTIFRAME



ARGENT (1 or 2 button)



TOUCH (1 or 2 button)



PREMIUM TOUCH



PREMIUM

- 9 different control panels to choose from

RAW WATER

For raw water, order inlet pump kit separately and disregard soleoid.



MENU ORDERING SKUs

TOILETS			
	SKU	SHORT DESCRIPTION	EXTENDED DESCRIPTION
SILENCE 2G	98357	T-S2G-012-H-W-PSOF-S-00000-0-0	SILENCE 2G 12V, HIGH, WHITE, WITH WOOD POLYESTER SOFT CLOSE SEAT & STANDARD SOLENOID
	98356	T-S2G-012-D-W-PSOF-S-00000-0-0	SILENCE 2G 12V, SHORT, WHITE, WITH WOOD POLYESTER SOFT CLOSE SEAT & STANDARD SOLENOID
	98355	T-S2G-024-H-W-PSOF-S-00000-0-0	SILENCE 2G 24V, HIGH, WHITE, WITH WOOD POLYESTER SOFT CLOSE SEAT & STANDARD SOLENOID
	98354	T-S2G-024-D-W-PSOF-S-00000-0-0	SILENCE 2G 24V, SHORT, WHITE, WITH WOOD POLYESTER SOFT CLOSE SEAT & STANDARD SOLENOID
	98353	T-S2G-012-H-P-PSOF-S-00000-0-0	SILENCE 2G 12V, HIGH, BONE, WITH WOOD POLYESTER SOFT CLOSE SEAT & STANDARD SOLENOID
	98352	T-S2G-012-D-P-PSOF-S-00000-0-0	SILENCE 2G 12V, SHORT, BONE, WITH WOOD POLYESTER SOFT CLOSE SEAT & STANDARD SOLENOID
	98351	T-S2G-024-H-P-PSOF-S-00000-0-0	SILENCE 2G 24V, HIGH, BONE, WITH WOOD POLYESTER SOFT CLOSE SEAT & STANDARD SOLENOID
	98350	T-S2G-024-D-P-PSOF-S-00000-0-0	SILENCE 2G 24V, SHORT, BONE, WITH WOOD POLYESTER SOFT CLOSE SEAT & STANDARD SOLENOID
SILENCE PLUS 2G	98349	T-S+2-012-H-W-PSOF-S-00000-0-0	SILENCE PLUS 2G 12V, HIGH, WHITE, WITH WOOD POLYESTER SOFT CLOSE SEAT & STANDARD SOLENOID
	98348	T-S+2-012-D-W-PSOF-S-00000-0-0	SILENCE PLUS 2G 12V, SHORT, WHITE, WITH WOOD POLYESTER SOFT CLOSE SEAT & STANDARD SOLENOID
	98347	T-S+2-024-H-W-PSOF-S-00000-0-0	SILENCE PLUS 2G 24V, HIGH, WHITE, WITH WOOD POLYESTER SOFT CLOSE SEAT & STANDARD SOLENOID
	98346	T-S+2-024-D-W-PSOF-S-00000-0-0	SILENCE PLUS 2G 24V, SHORT, WHITE, WITH WOOD POLYESTER SOFT CLOSE SEAT & STANDARD SOLENOID
	98345	T-S+2-012-H-P-PSOF-S-00000-0-0	SILENCE PLUS 2G 12V, HIGH, BONE, WITH WOOD POLYESTER SOFT CLOSE SEAT & STANDARD SOLENOID
	98344	T-S+2-012-D-P-PSOF-S-00000-0-0	SILENCE PLUS 2G 12V, SHORT, BONE, WITH WOOD POLYESTER SOFT CLOSE SEAT & STANDARD SOLENOID
	98343	T-S+2-024-H-P-PSOF-S-00000-0-0	SILENCE PLUS 2G 24V, HIGH, BONE, WITH WOOD POLYESTER SOFT CLOSE SEAT & STANDARD SOLENOID
	98342	T-S+2-024-D-P-PSOF-S-00000-0-0	SILENCE PLUS 2G 24V, SHORT, BONE, WITH WOOD POLYESTER SOFT CLOSE SEAT & STANDARD SOLENOID
SILENCE PLUS 2G 110 V	98341	T-S+2-110-H-W-PSOF-S-00000-0-0	SILENCE PLUS 2G 110V, HIGH, WHITE, WITH WOOD POLYESTER SOFT CLOSE SEAT & STANDARD SOLENOID
CONTROL PANELS			
	SKU	DESCRIPTION	
CONTROL PANELS	36082	STANDARD ALL IN ONE CONTROL PANEL WITH 1 BUTTON	
	38072	STANDARD ALL IN ONE CONTROL PANEL WITH 2 BUTTONS	
	98126	MULTIFRAME CONTROL PANEL 2 BUTTONS	
	98125	ARGENT PIEZO METAL CONTROL PANEL WITH 1 BUTTON	
	98124	ARGENT PIEZO METAL CONTROL PANEL WITH 2 BUTTONS	
	98123	TOUCH GLASS CONTROL PANEL WITH 1 BUTTON	
	98122	TOUCH GLASS CONTROL PANEL WITH 2 BUTTONS	
	98120	PREMIUM TOUCH GLASS CONTROL PANEL 2 BUTTONS INCLUDING CONTROLLER AND STA	
	98121	PREMIUM CONTROL PANEL WITH 2 BUTTONS INCLUDING CONTROLLER AND STA (EU KIT W/O DEUTSCH CONNECTORS)	
	98131	CUSTOM MADE - STANDARD ALL IN ONE CONTROL PANEL WITH 2 BUTTONS (DEUTSCH CONNECTORS)	
OPTION (RAW WATER KIT)			
	SKU	DESCRIPTION	
RAW WATER KITS	38147	MARINE WATER PUMP 24V	
	38148	MARINE WATER PUMP 12V	

THETFORD

Marine



UNITED STATES OF AMERICA

Thetford Corporation
7101 Jackson Road
Ann Arbor, Michigan 48103
U.S.A.

[734] 769-6000
info@thetford.com



For more information or to find your nearest
Thetford Marine dealer or service location check
www.thetfordmarine.com